
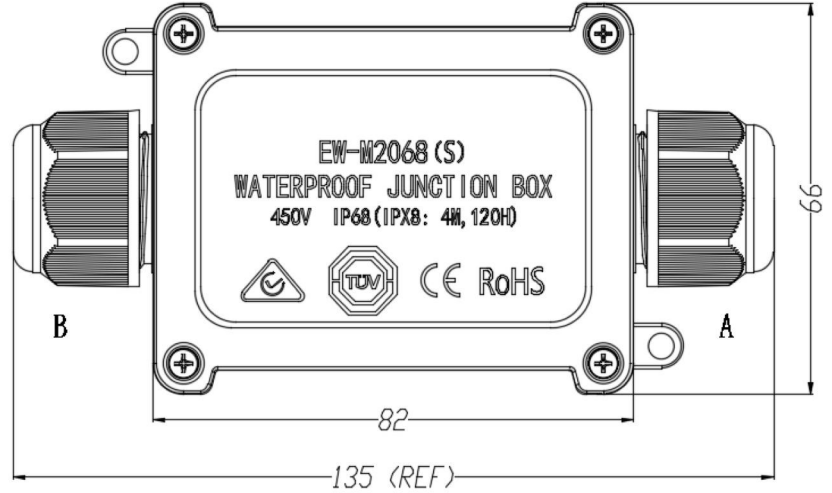
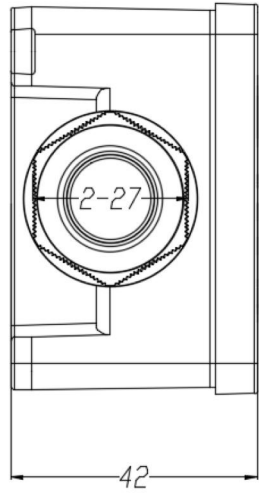


Raw Material	PA66, SILICONE, STAINLESS STEEL
Certification	SAA/TUV/RoHS/CE
Flame-resistant rating	UL94 V-2
Level of protection	IP68
Voltage rating	450 V
Withstanding voltage	2500 V
Cable gague	0.5~6.0mm ²
Operating temperature	-40~105 °C

REV	DESCRIPTION	DESIGN	DATE
A0	NEW DRAWING	MYJ	2022/5/10

Part Number	Rubbers Diameter (d)	Outer Cable Diameter
EW-M2068S-2T	A/B: ϕ 14mm	ϕ 10~14 mm
	A/B: ϕ 12mm	ϕ 9~12 mm
	A/B: ϕ 8.5mm	ϕ 5~9 mm

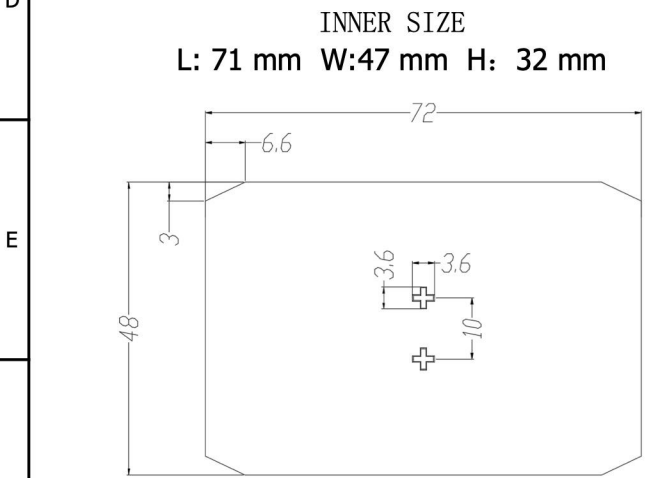

TOLERANCE UNSPECIFIED				UNIT	mm	DRAW		P/N	EW-M2068S-2T
X. \pm 0.35	X.XX \pm 0.10	X. ^o \pm 3 ^o	X.X ^o \pm 2 ^o	SCALE	1:1	CHKD			
X.X \pm 0.20	X.XXX \pm 0.05	X.XX ^o \pm 1 ^o		SHEET	1/1	APPD		TITLE	WATERPROOF JUNCTION BOX

