


TECHNICAL DATA SHEET

DAB12-14

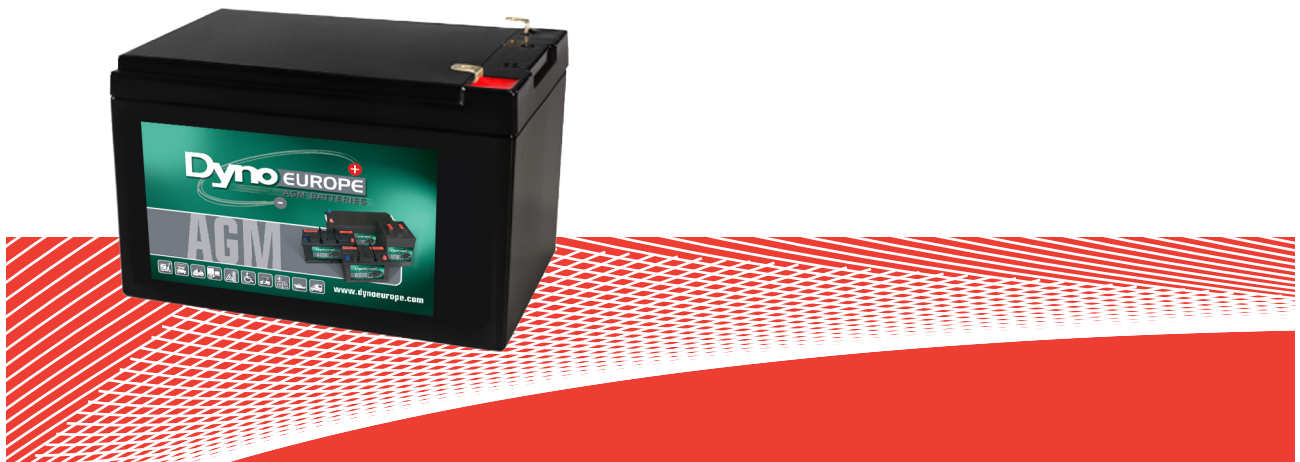

Applications


- > Electric vehicle
- > Electric wheelchair
- > Electric scooter
- > Electric play car for children
- > Garbage truck
- > Patrol car
- > Stationary applications

General Features

- > High Corrosion Resistant Performance: Pb-Ca multi-alloy grid
- > High Energy Density and Power Density
- > Excellent Charge Acceptance Ability
- > Strong High and Low Temperature Performance
- > Optimized Capability of instant High-current Discharging
- > Low self-discharge rate



Dimension: 151(L)×98.5(W)×96(H)×100(TH) Unit: mm



Specification

Nominal Voltage	12V
Nominal Capacity	16.4Ah
Design life	5 years
Terminal	M5
Approx. Weight	Approx 4.35kg (9.60lbs)
Container Material	ABS
Rated Capacity	16.4Ah 20Hour Rate (0.82 A to 10.5V) 15.4Ah 10Hour Rate (1.54 A to 10.5V) 14.5Ah 5Hour Rate (2.91 A to 10.5V)
Operating Temperature	Discharge: -20 ~50°C(-4~ 122°F) Charge: -20 ~50°C(-4~ 122°F) Storage: -20 ~50°C(-4~ 122°F)
Charge current:	Max. 2.40 A
Charge Method (25 °C)	Float Charge: 13.7 -13.9 V, recom. 13.8 V(-18mV/ °C) Cycle charge: 14.28 -14.4 V, recom. 14.4 V(-30mV/ °C)
Self discharge	3% of capacity declined per month at 25°C

TECHNICAL DATA SHEET

DAB12-14

Constant Current Discharge Characteristics Unit: A (25°C, 77°F)

FV/Time	5min	15min	30min	1h	2h	3h	5h	8h	10h	20h
1.60V	56.4	30.3	18.4	10.8	6.17	4.58	3.01	1.93	1.58	0.83
1.65V	54.6	29.4	18.1	10.7	6.14	4.53	2.98	1.91	1.57	0.83
1.70V	52.5	28.7	17.8	10.6	6.10	4.46	2.95	1.90	1.55	0.82
1.75V	48.2	27.8	17.6	10.5	6.00	4.42	2.91	1.88	1.54	0.82
1.80V	43.2	25.9	16.9	10.2	5.89	4.38	2.84	1.87	1.52	0.81
1.85V	38.6	23.1	15.4	9.45	5.59	4.13	2.70	1.79	1.48	0.80

Constant Power Discharge Characteristics Unit: W/cell(25°C, 77°F)

FV/Time	5min	15min	30min	1h	2h	3h	5h	8h	10h	20h
1.60V	94.5	53.3	33.3	20.4	11.7	8.70	5.70	3.75	3.05	1.64
1.65V	90.9	52.4	33.0	20.2	11.6	8.59	5.67	3.72	3.02	1.64
1.70V	90.4	51.8	33.0	20.0	11.6	8.54	5.63	3.70	2.99	1.63
1.75V	84.3	51.5	32.8	19.9	11.5	8.50	5.59	3.67	2.95	1.62
1.80V	77.4	48.6	32.1	19.7	11.5	8.46	5.53	3.64	2.92	1.61
1.85V	69.1	43.5	29.4	18.3	11.0	8.05	5.28	3.52	2.88	1.60


Disclaimer: Manufacturers have the right to self-modify the parameters of the product updates, please keep in touch with manufacturers to obtain the latest information.

Charger recommendations


Type of charger	Zivan	AQHF WP	AQHF24-30FC G2
Matching profile	AGM =BA1+CU2	AMG SLA	AGM

Max. charging current 2.4Vpc


Discharge characteristic

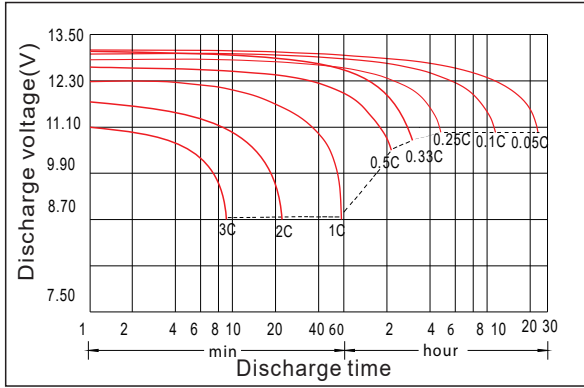


Charging characteristic

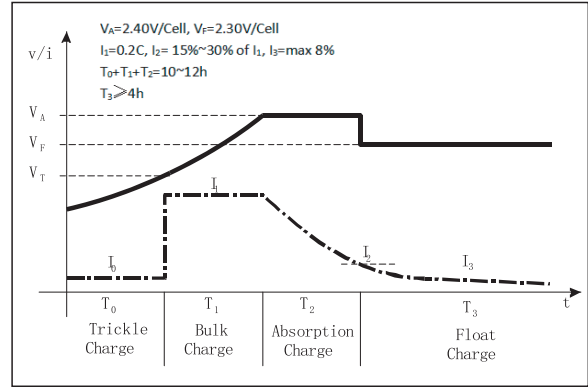


The effect of temperature on capacity

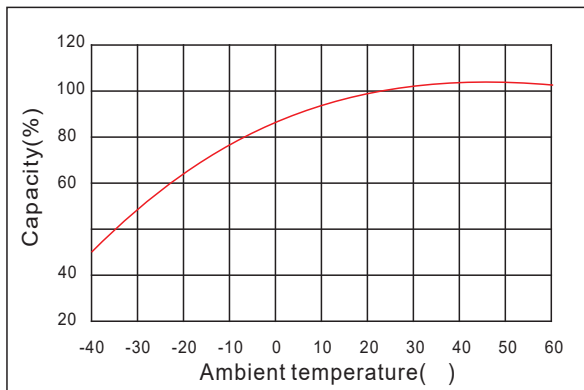

The effect of discharge depth on cycle life

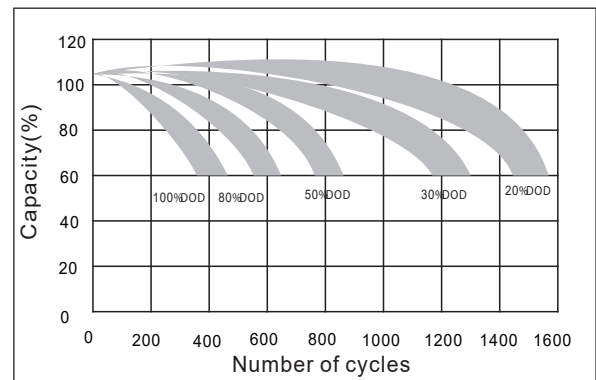

Curves of self-discharge

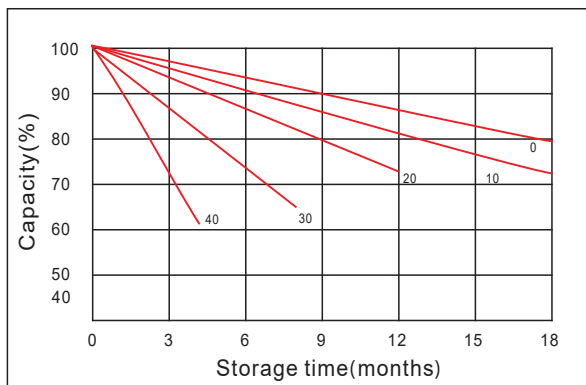

Curves of open circuit voltage vs. capacity

