


55066[12V50Ah]



Dimensions (mm)

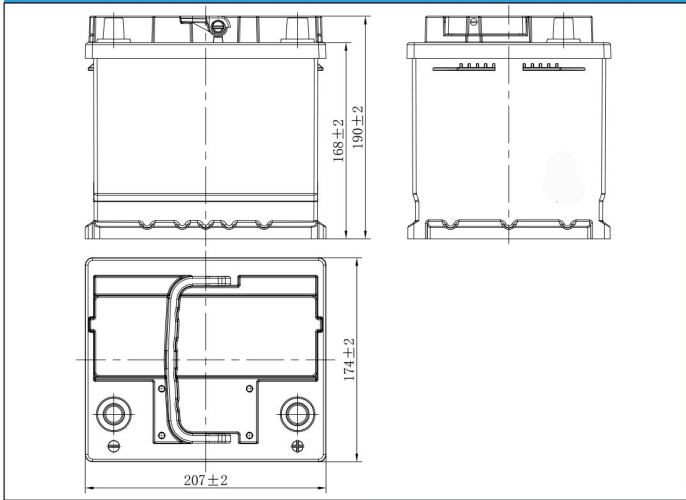


Physical Specification (mm)

Nominal Voltage		12V
Nominal Capacity(20HR)		50Ah
Dimension	Length	207 ± 2mm(8.15inches)
	Width	175 ± 2mm(6.85inches)
	Container Height	190 ± 2mm(7.48inches)
	Total Height(with Terminal)	190 ± 2mm(7.48inches)
Weight		Approx 12.0Kg(26.46lbs)
Acid		1.280 ± 0.015g/cm ³ (25°C)
Standard Terminal		1
Cell layout		0
Hold-Down		B13
Cell plate qty		/
Case		Gray -PP Material
Cover		Gray -PP Material
Handle		Gray-PP Material
QTY/PLT/layer		/

Electrical Specification

Rated Capacity	20 hour rate(2.45A)	50Ah
Reserve Capacity		77min
Cold Cranking Performance Amps@0°F(-18°C)		430A


Discharge Characteristics(25°C, 77°F)

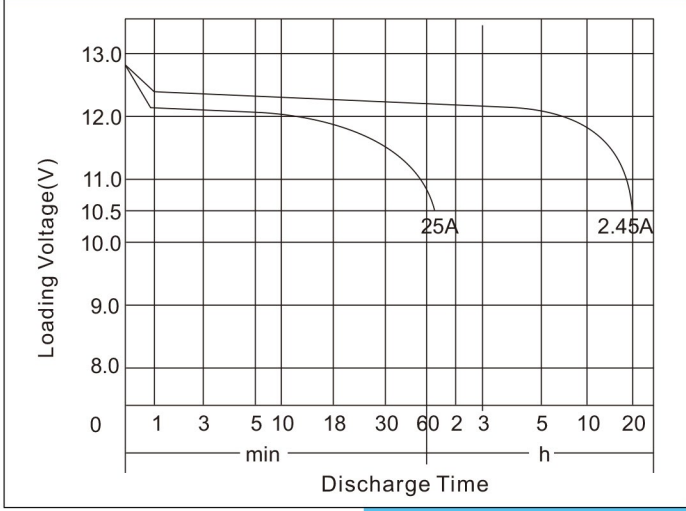

Standard Terminal (mm) Cell Layout

Terminal Type	D		Cell Layout
	Positive	Negative	
1	19.5 ⁰ _{-0.3}	17.9 ⁰ _{-0.3}	<p>Figure(0)</p>

Discharge Characteristics(-18°C, 0°F)

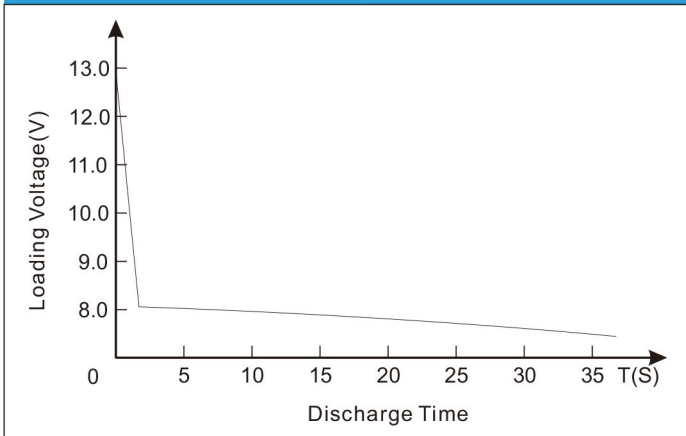

*Values are subject to variation of +/- 5% in normal manufacturing processes.
 *Technical specifications and the product line above could be changed without prior notice.