

# PS600 C-SJ5-8

## Solar submersible pump system for 4" wells

### Applications

- Drinking water supply
- Pond management
- Irrigation
- Livestock watering
- Pressurizing systems

### Characteristics

- Fast, failure-free installation
- Excellent serviceability
- High reliability and life expectancy
- Short Return of Investment (ROI) cycle
- Lower Total Cost of Ownership (TCO)

### Technical data

Total dynamic head	max. 30 m
Flow rate	max. 6,5 m³/h
Vmp*	> 68 V
Voc	max. 150 V

### Standards

**CE** 2006/42/EC, 2004/108/EC, 2006/95/EC

The logos shown reflect the approvals that have been granted for this product family. Products are ordered and supplied with the approvals specific to the market requirements.



### Components

#### Controller: PS600

- Controlling and monitoring
- Control inputs for dry running protection, remote control etc.
- Protected against reverse polarity, overload and overtemperature
- Integrated MPPT (Maximum Power Point Tracker)
- Low voltage disconnect for battery operation

#### Motor: ECDRIVE 600-C

- Maintenance-free brushless DC motor
- Water filled
- No electronics in the motor
- Submersion max. 250 m, IP68

#### Pump end: PE C-SJ5-8

- High reliability and life expectancy
- Non-return valve
- Premium materials
- Optional: dry running protection




# PS600 C-SJ5-8

Solar submersible pump system for 4" wells

## Pump chart


Vmp\* > 68 V

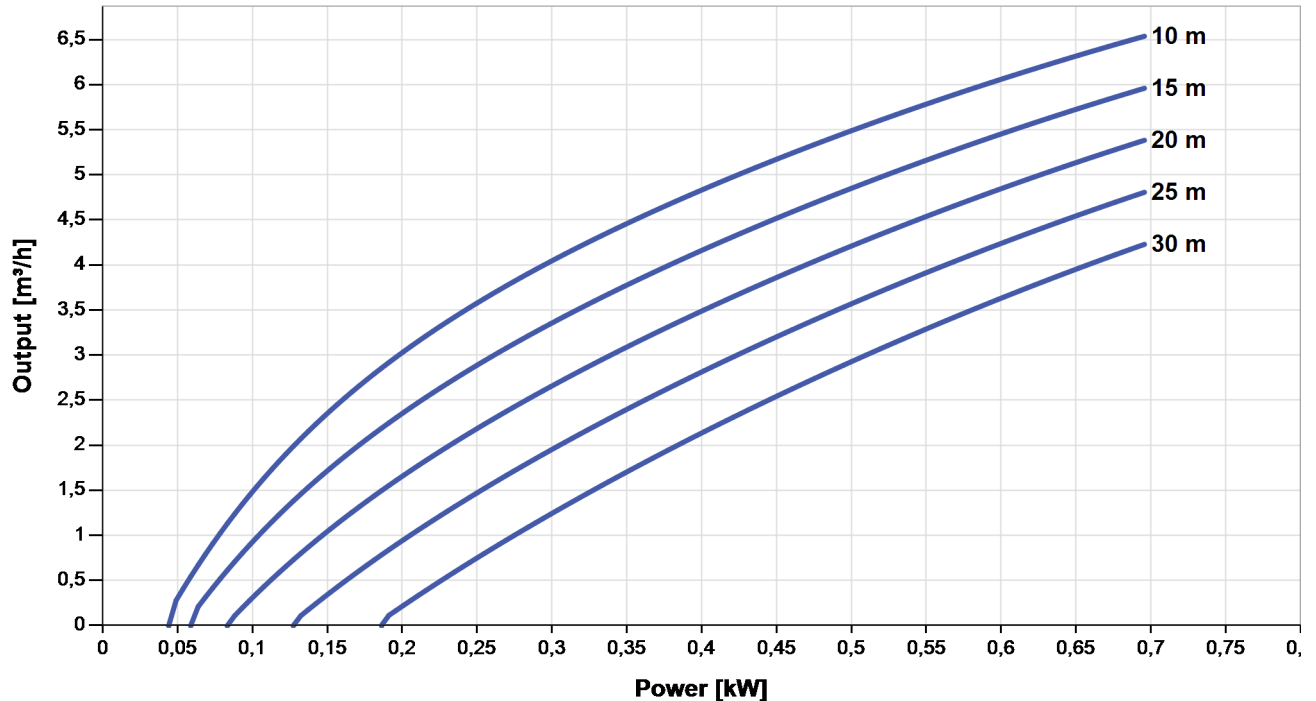

## Dimensions and weights


### Controller

H = 396 mm  
H2 = 364 mm  
W1 = 178 mm  
W2 = 156 mm  
W3 = 116 mm  
D = 165 mm  
D1 = 150 mm

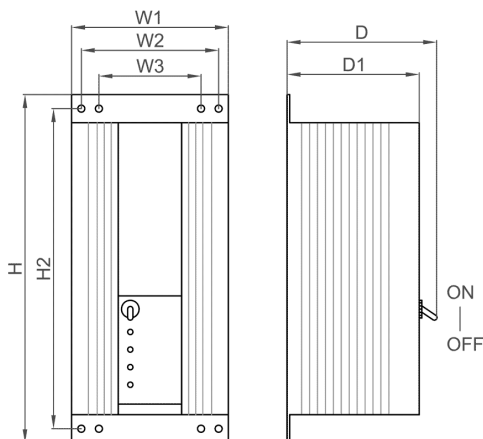

### Pump unit

A = 524 mm  
B = 185 mm  
C = 339 mm  
D = 96 mm  
E = 98 mm  
S = 1,5 in

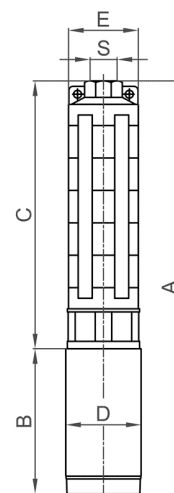

	Net weight
Controller	4,5 kg
Pump unit	11 kg
Motor	7,0 kg
Pump end	4,2 kg

\*Vmp: MPP-voltage under Standard Test Conditions (STC): 1000 W/m² solar irradiance, 25 °C cell temperature