

Stilling Tube for HR Pump

Device to protect the pump from dirt

Where water sources contain sand or have the potential for dirt falling into them (uncapped wells) a stilling tube is recommended to protect the pump from the dirt.

ORDER INFORMATION

- **Item no.:** 19-000220 **product name:** Stilling Tube for HR Pump
- **Item no.:** 19-000240 **product name:** Stilling Tube Adaptor for HR Pump

FEATURES

- Due to the large inner diameter of the stilling tube the water rises very slow, the dirt settles down at the bottom of the well
- Pump has to handle less sand, which will increase the pump's life span
- Trouble free installation
- Can be used with PS200-PS4000 HR Pumps
- Min. borehole diameter of 6 in (150mm) needed

SCOPE OF DELIVERY

- (1) 1x stilling tube adapter
- (2) 2x hose clamp
- (3) 4x countersunk bolt M6x20
- (4) 1x PVC tube: $\varnothing 125 \times 5$, 800 mm length

Product can be ordered without the PVC tube, then the tube must be purchased locally


DIMENSION/WEIGHT

Complete Stilling Tube device:

- Packaging dimensions: 850 x 160 x 140 mm
33.5 x 6.3 x 5.5 in
- Total weight: 4.0 kg / 8.82 lbs

Stilling Tube Adaptor (without PVC tube):

- Packaging dimensions: 300 x 160 x 140 mm
11.8 x 6.3 x 5.5 in
- Total weight: 1.0 kg / 2.20 lbs

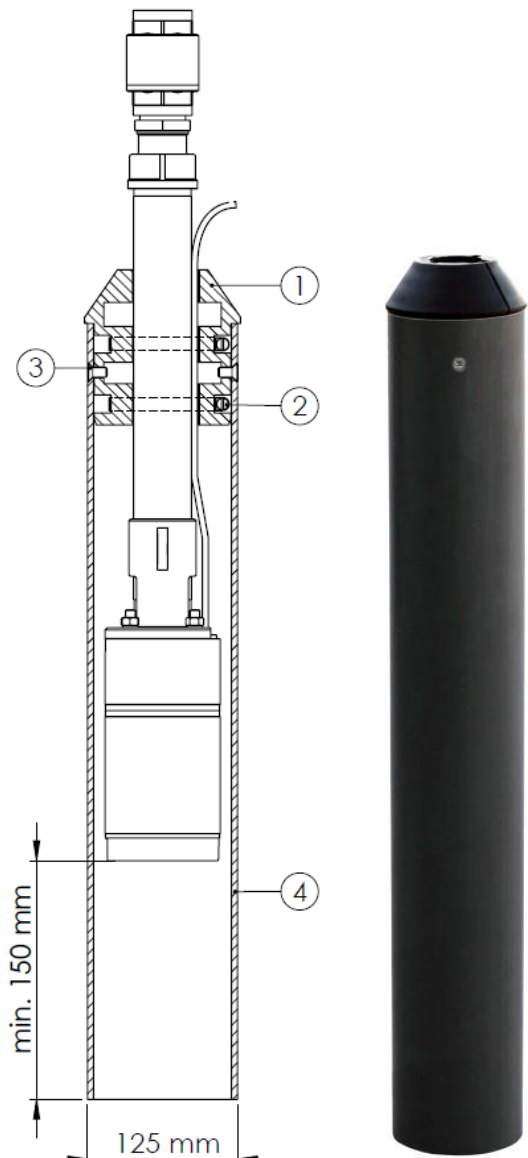

BERNT LORENTZ GmbH & Co. KG
 Siebenstuecken 24, 24558 Henstedt-Ulzburg, Germany
 Tel +49 (0)4193 8806-700, www.lorentz.de

Sun. Water. Life.

All specifications and information are given with good intent, errors are possible and products may be subject to change without notice. Pictures may differ from actual products depending on local market requirements and regulations.