

# SERIES 4500


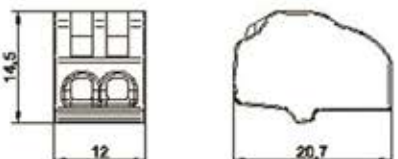



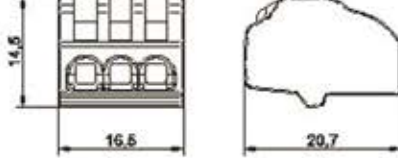



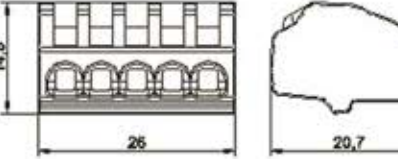


The new series of lever connectors is the easiest and fastest way to connect or disconnect any type of cable. Available to use rigid and flexible cable from 0.2 mm<sup>2</sup> to 4 mm<sup>2</sup>. Completely reusable. Transparent housing for visual inspection and test slot.



## Raw materials:

**Moulding:** transparent polycarbonate VO (according to UL94)

**Insert:** stainless steel.

4502		6,000 pcs. 320x320x370 mm		19,16 Kg	
		100 pcs. 100x70x70 mm		0,309 Kg	
 <p><b>RIGID CABLE</b> 4 mm<sup>2</sup> / 0,2 mm<sup>2</sup></p>		Voltage 450V	Current rating 32A	 85°C	
 <p><b>FLEXIBLE CABLE</b> 4 mm<sup>2</sup> / 0,2 mm<sup>2</sup></p>					
4503		3,600 pcs. 320x320x370 mm		17,00 Kg	
		60 pcs. 100x70x70 mm		0,260 Kg	
 <p><b>RIGID CABLE</b> 4 mm<sup>2</sup> / 0,2 mm<sup>2</sup></p>		Voltage 450V	Current rating 32A	 85°C	
 <p><b>FLEXIBLE CABLE</b> 4 mm<sup>2</sup> / 0,2 mm<sup>2</sup></p>					
4505		2,400 pcs. 320x320x370 mm		16,20 Kg	
		40 pcs. 100x70x70 mm		0,270 Kg	
 <p><b>RIGID CABLE</b> 4 mm<sup>2</sup> / 0,2 mm<sup>2</sup></p>		Voltage 450V	Current rating 32A	 85°C	
 <p><b>FLEXIBLE CABLE</b> 4 mm<sup>2</sup> / 0,2 mm<sup>2</sup></p>					