
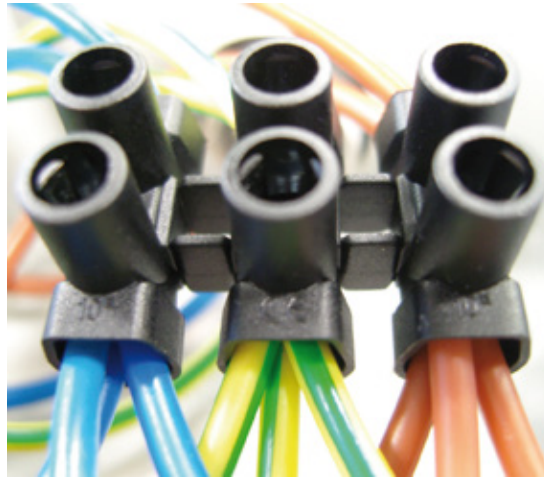


SERIES 100

Used for making electrical connections with copper conductors.

This series has been developed considering the electrician's requirements and uses in new installations and maintenance works as well.

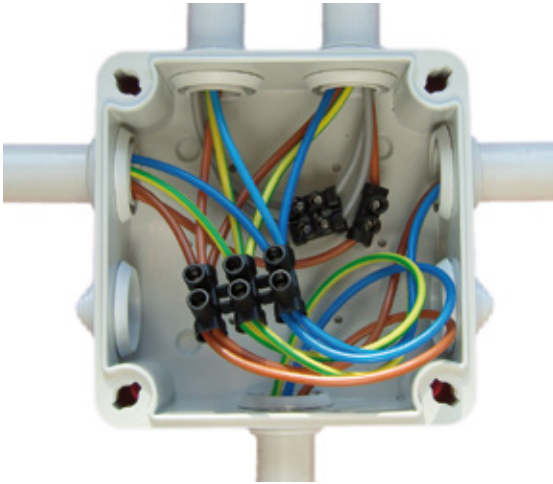

Raw materials:

Moulding: polyamide 6, natural or black colour. V2 (according to UL94).


Insert: nickel-plated brass.

Screws: zinc-plated steel. Metric thread.



Glow-wire test 960°C according to EN 60695-2-11

Technical features according to EN 60998

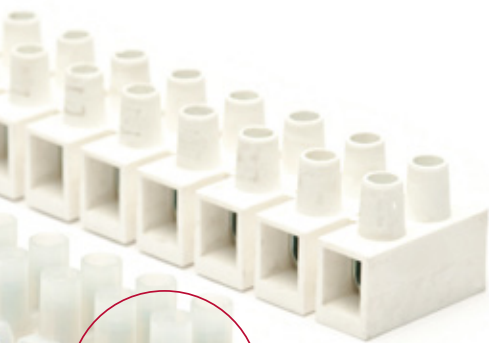

No sharp shape




Supplied with screws in raised position

No remaining burrs



Extra insulation

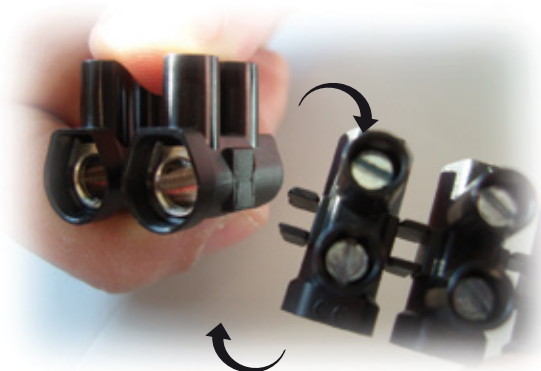


No tools needed to cut to length



Types up to 35 mm²: smaller size

SERIES 100

Bigger insert diameter for connecting more cables



Regular terminal strip



Series 100

<p>104 ● 104 N ●</p> <p>SOLID CABLE 2,5 mm² / 1 mm²</p> <p>FLEXIBLE CABLE 2,5 mm² / 1 mm²</p>		<p>200 pcs. 375x159x97 mm</p> <p>0,4 Nm M 2,6</p> <p>Voltage 450V</p> <p>Current rating 24A</p>	<p>3,8 Kg</p> <p>12 ways</p> <p>110°C</p>
<p>106 ● 106 N ●</p> <p>SOLID CABLE 6 mm² / 2,5 mm²</p> <p>FLEXIBLE CABLE 4 mm² / 2,5 mm²</p>		<p>200 pcs. 400x160x125 mm</p> <p>0,5 Nm M 3</p> <p>Voltage 450V</p> <p>Current rating 41A</p>	<p>5,3 Kg</p> <p>12 ways</p> <p>110°C</p>
<p>110 ● 110 N ●</p> <p>SOLID CABLE 10 mm² / 4 mm²</p> <p>FLEXIBLE CABLE 6 mm² / 4 mm²</p>		<p>200 pcs. 440x185x150 mm</p> <p>0,8 Nm M 3,5</p> <p>Voltage 450V</p> <p>Current rating 57A</p>	<p>8,2 Kg</p> <p>12 ways</p> <p>110°C</p>
<p>116 ● 116 N ●</p> <p>SOLID CABLE 16 mm² / 6 mm²</p> <p>FLEXIBLE CABLE 10 mm² / 6 mm²</p>		<p>120 pcs. 360x170x165 mm</p> <p>1,2 Nm M 4</p> <p>Voltage 450V</p> <p>Current rating 76A</p>	<p>7,4 Kg</p> <p>12 ways</p> <p>110°C</p>
<p>135 ● 135 N ●</p> <p>SOLID CABLE 35 mm² / 16 mm²</p> <p>FLEXIBLE CABLE 25 mm² / 16 mm²</p>		<p>60 pcs. 369x125x212 mm</p> <p>2 Nm M 5</p> <p>Voltage 450V</p> <p>Current rating 125A</p>	<p>7,5 Kg</p> <p>12 ways</p> <p>110°C</p>